



PRODUCT

SPECIFICATION

Full color relay controller


HD-K524

V1.0

1. Product Introduction

- Support timing function instead of timer and delay;
- 1-way photosensitive probe can automatically adjust brightness;
- Support 6-way power switch control.

2. Appearance

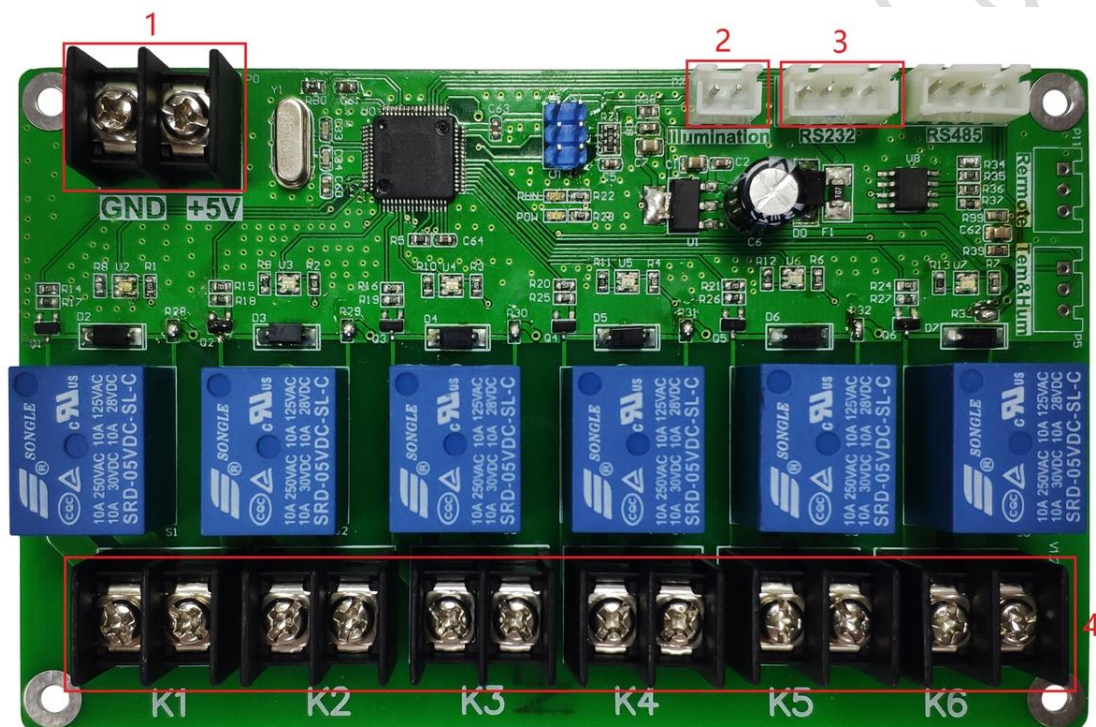


1.5V power supply port;

2. Photosensitive probe port;

3. Sending card / play box connection port;

4. Power switch control port.

3. Equipment Size

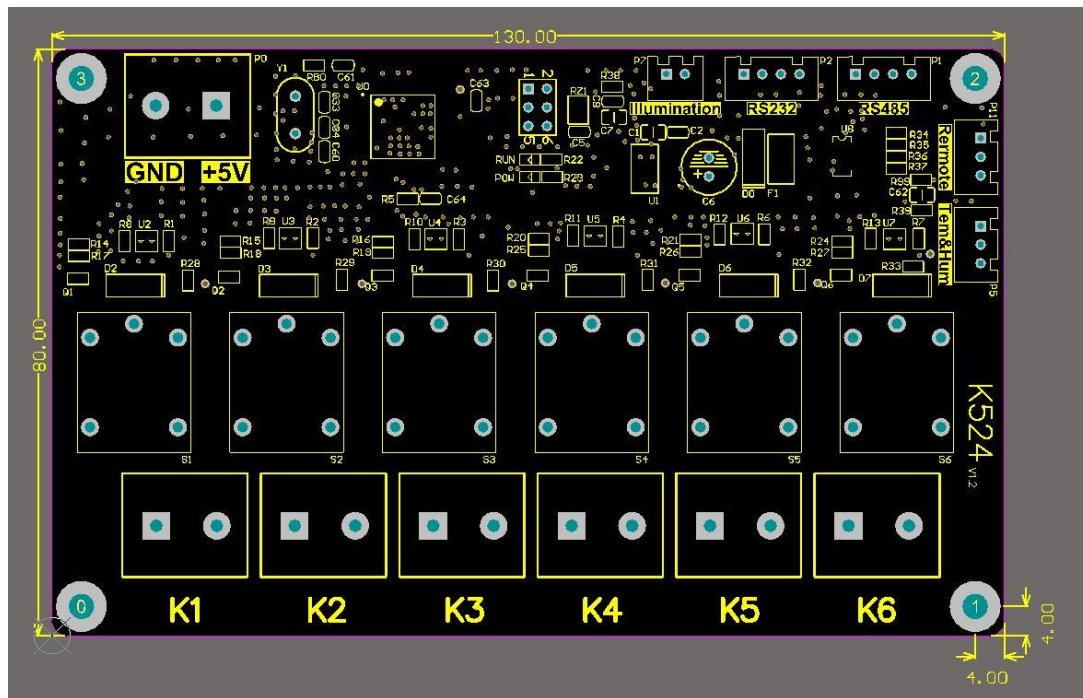

4. Specification

	Minimum	Typical	maximum
Rated voltage(V)	4.2	5.0	5.5
storage temperature(°C)	-40	25	105
Working temperature(°C)	-40	25	80
Working humidity(°C)	0.0	30	95

5. Attentions

- 1) To ensure the time storage of the control card during normal operation, please ensure that the battery on the control card is not loose;
- 2) In order to ensure the long-term stable operation of the system, please ensure that the power supply of the control card and the relay operates power on. Use a standard 5V power supply voltage.

Description:

Copyright © 2026 Shenzhen Huidu Technology Co., Ltd.

No entity or individual may imitate, reproduce, modify or translate part or all of the contents of this specification without authorization from Shenzhen Huidu Technology Co., Ltd.

Due to production batches, manufacturing techniques, function upgrades and other factors, our company reserves the right to adjust and revise relevant images, text descriptions, product parameters and other contents without prior notice. All product images in this document are for reference only, please refer to the actual products.

This document adopts the font of HarmonyOS Sans SC.